

Dimension: 159 × 97 × 38mm

Features:

- AC input voltage range selected by switch
- Small volume, low weight, high efficiency
- Protections : short circuit/over load/over voltage
- Cooling by free air convection
- LED indicator for power on
- 100% full load burn-in test
- 3 Years warranty



SPECIFICATION


	Model	NES-150-5	NES-150-12	NES-150-15	NES-150-24	
Output	DC voltage	5V	12V	15V	24V	
	Voltage tolerance	± 1%	± 1%	± 1%	± 1%	
	Rated current	25A	12.5A	10A	6.5A	
	Current range	0 ~ 25A	0 ~ 12.5A	0 ~ 10A	0 ~ 6.5A	
	Rated power	125W	150W	150W	156W	
	Ripple&noise	100mVp-p	120mVp-p	120mVp-p	150mVp-p	
	DC voltage ADJ. range	-9% ~ +10%	± 10%	± 10%	± 10%	
	Setup, rise, hold up time	800ms,20ms,24ms/230VAC,1200ms,30ms,20ms/115VAC				
Input	Voltage range	90 ~ 132VAC/180 ~ 264VAC 47 ~ 63Hz(Selected by switch), 254 ~ 373VDC				
	AC current	3.2A/115VAC 1.6A/230VAC				
	Efficiency	79%	83%	84%	85%	
	Inrush current	Cold start 20A/115V 40A/230VAC				
	leakage current	< 3.5mA/240VAC				
Protection	Overload	Rated output power 115% ~ 135% Start overload protection				
		Protection type: hiccup mode, auto-recovery after fault condition is removed				
	Over voltage	6.8 ~ 8.2V	15.6 ~ 17.8V	18.6 ~ 20.8V	30.6 ~ 33.2V	
Environment	Working temp, humidity		-20°C ~ +40°C; 20% ~ 90%RH (Please refer to "derating curve")			
	Storage temp, humidity		-20°C ~ +85°C; 10% ~ 95%RH Non-condensing			
	Withstand vibration		10 ~ 500Hz, 2G 10min./1Cycle, Period for 60min, Each axes			
Safety	Withstand voltage	I/P-O/P: 3KVAC I/P-FG: 2KVAC O/P-FG: 0.5KVAC				
	Isolation resistance	I/P-O/P: I/P-FG,O/P-FG: 100M Ohms/500VDC				
Fit standard	Safety standard	Compliance to UL1012, KC K60950-1				
	EMC Standard	Compliance to EN55022, CLASS A; KCC KN22 KN24, CLASS A				
Others	Dimension	0.54kg 159*97*38 (L*W*H)				
	Weight	0.54kg/45pcs/25kg/1.45CUFT				

Note: 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.

2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
3. Tolerance : includes set up tolerance, line regulation and load regulation.

Mechanical specification


Unit:mm

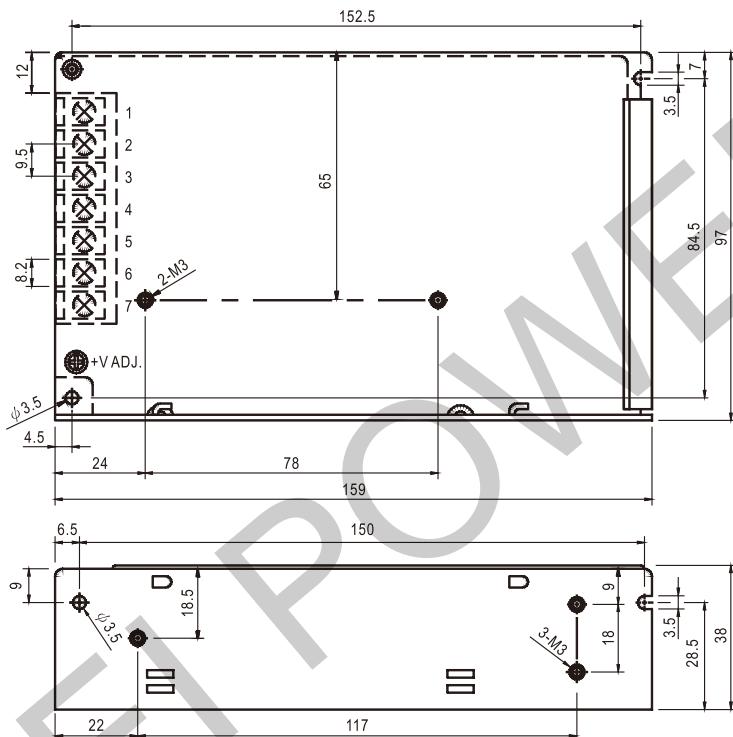


Terminal Pin No.Assignment

Pin No.	Assignment	Pin No.	Assignment
1	AC/L	4 ~ 5	DC OUTPUT -V
2	AC/N	6 ~ 7	DC OUTPUT +V
3	FG \pm		

Block diagram

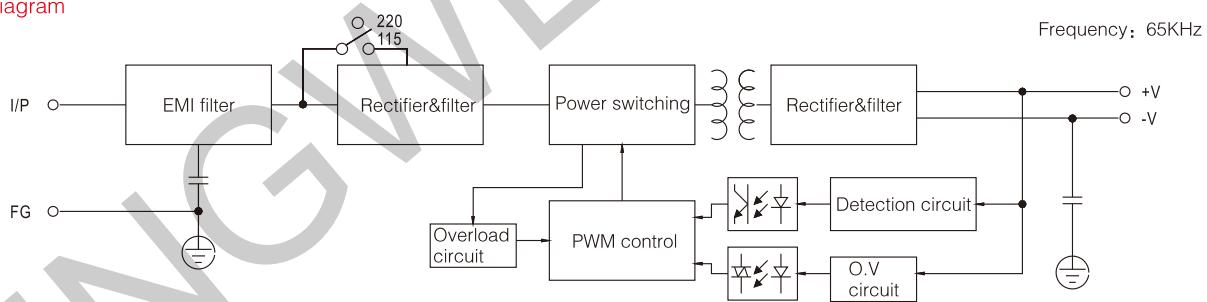

Derating curve

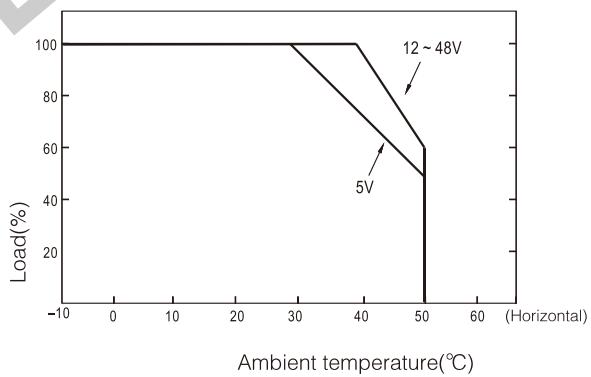

Static characteristic

