



Dimension: 190 × 49 × 34mm

Features:

- Constant voltage style power supply
- 160–264 VAC input range
- Small volume, low weight, high efficiency
- Protections : short circuit/over load/over temp
- Cooling by free air convection
- Fully encapsulated with IP67 level
- 100% full load burn-in test
- 2 Years warranty

IP67 CE

SPECIFICATION

Model		LPV-50-12	LPV-50-24	LPV-50-36
Output	DC voltage	12V	24V	36V
	Voltage tolerance	± 3%	± 2%	± 2%
	Rated current	4.2A	2.1A	1.4A
	Current range	0 ~ 4.2A	0 ~ 2.1A	0 ~ 1.4A
	Rated power	50.4W	50.4W	50.4W
	Ripple&noise	100mVp-p	150mVp-p	180mVp-p
	Setup, rise, hold up time	500ms,20ms,24ms/230VAC		
Input	Voltage range	160 ~ 264VAC 47 ~ 63Hz, 235 ~ 373VDC		
	AC current	0.8A/230VAC		
	Efficiency	82%	84%	85%
	Inrush current	Cold start35A/230VAC		
	leakage current	< 2mA/240VAC		
Protection	Overload	Rated output power115% ~ 150%Start overload protection Protection type: hiccup mode, auto-recovery after fault condition is removed		
	Over temperature	When temperature of transistor inner node is over150°C ± 10°C,Start over temp protection Protection mode: cutoff output, auto-recovery after temperature become normal		
	Working temp, humidity	-20°C ~ +60°C;20% ~ 90%RH(Please refer to "derating curve")		
Environment	Storage temp, humidity	-40°C ~ +85°C;10% ~ 95%RH Non-condensing		
	Withstand vibration	10 ~ 500Hz, 2G 10min./1Cycle, Period for 60min, Each axes		
Safety	Withstand voltage	I/P-O/P: 1.5KVAC , I/P-FG:1.5KVAC ,O/P-FG:0.5KVAC		
	Isolation resistance	I/P-O/P,I/P-FG,O/P-FG: 100M Ohms/500VDC		
Fit standard	Safety standard, Protection level	Fit UL1012,TUV EN60950-1, IP67		
	EMC Standard	Fit EN55022, EN55024,CLASSA		
Others	Weight/Dimension	0.53kg 190*49*34 (L*W*H)		
	Packing	0.53kg/30pcs/16kg/0.025m³/0.88CUFT		


Note: 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.

2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.

3. Tolerance : includes set up tolerance, line regulation and load regulation.

Mechanical specification


Unit:mm

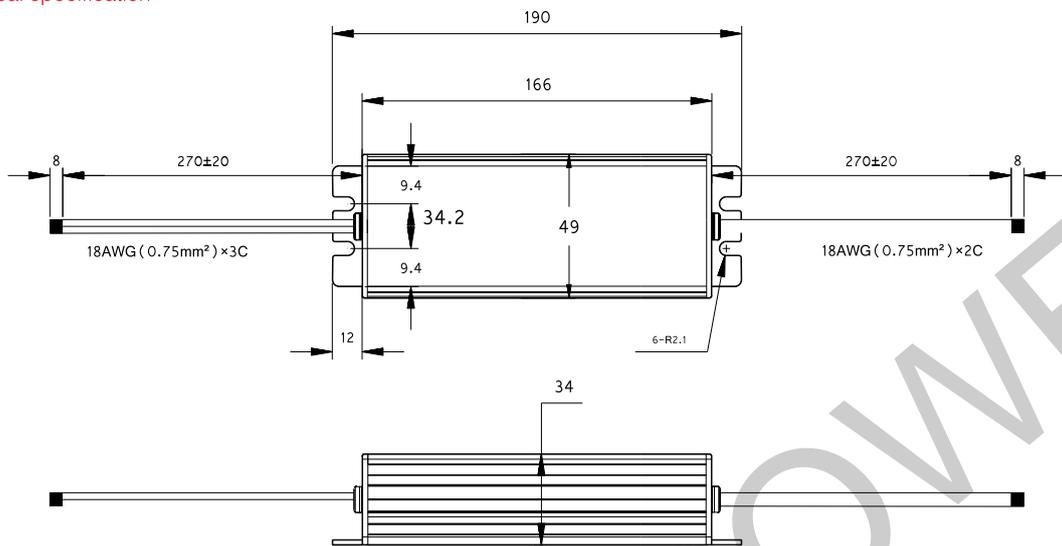


lead-out wire assignment

Input(Black three-core)		Output (White two-core)	
Brown	AC/L	Red	DC OUTPUT +V
Blue	AC/N	Black	DC OUTPUT -V
Yellow-green	FG \perp	Shell connect with earth	

Block diagram

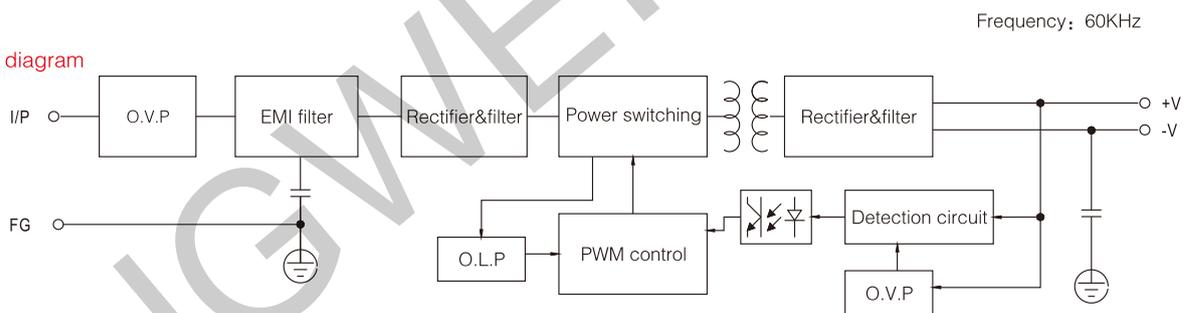

Derating curve

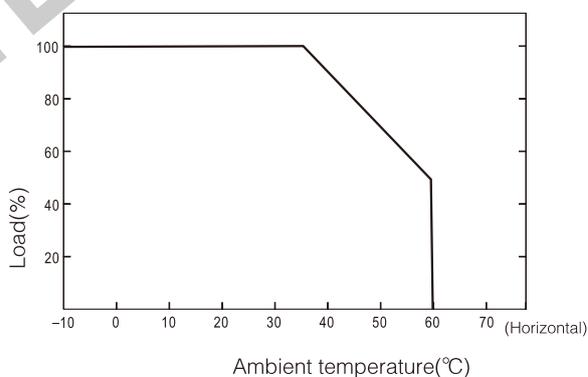

Static characteristic

